





- The tail lift for safe load handling in the most demanding applications
- 3,000 kg lifting capacity with 1,000 mm load distance
- Extremely robust four-cylinder lifting mechanism
- Available with steel or aluminium platform
- Large selection of special equipment available

LOAD DIAGRAM

a (mm)	Q (kg)
1,000	3,000
1,200	2,500
1,500	2,000
1,800	1,650
2,400	1,250



THE INDESTRUCTIBLE TAIL LIFT WITH 3,000 KG LIFTING CAPACITY

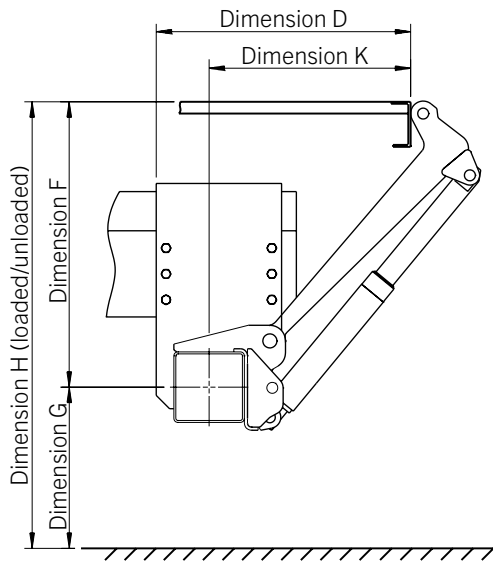

WEIGHTS

Aluminium platform type

Platform width (mm)	2500
Platform height (mm)	
2,050	720 kg
2,400	802 kg

Steel platform type

Platform width (mm)	2,500
Platform height (mm)	
2,409	980 kg

DIMENSIONS

Lifting arm lengths (mm)	900	1,000
H (max.) loading height, unloaded	1,554	1,748
H (min.) loading height, loaded	1,030	1,180
F (max.) middle of main beam to upper edge of loading floor	924	1,027
K (min.) at dimension F (max.)	652	679
D (min.) installation dimension, minimum	807	834
F (min.)	645	795
K (max.) at dimension F (min.)	901	922
D (max.) installation dimension, maximum	1,056	1,077

TECHNICAL DATA

Type	MBB C 3000 S
Lifting capacity	3,000 kg
Main beam	190 x 190 mm
Lifting gear hydraulics	2 lifting cylinders / 2 tilting cylinders
Platform overlap with floor	-72 mm
Lifting arm pitch	1,300 mm
Load centre, longitudinal	1,000 mm 1,000 mm
Load centre, across centre	Central, 50% of rated load on one side
Inclination angle of the platform	+90° to -10°

